

### Scheda Materiali / Specifications

- |                               |                          |
|-------------------------------|--------------------------|
| 1 Corpo in Ottone             | 1 Brass Body             |
| 2 Coperchio in Ottone         | 2 Brass Cover Cap        |
| 3 Molla in acciaio inox       | 3 Stainless steel Spring |
| 4 Guarnizione in NBR 65 SH/PS | 4 NBR 65 SH/PS Seal      |
| 5 Otturatore in plastica      | 5 Plastic Shutter        |

### Pressioni / Pressures

Pressione minima / Minimum Pressure: 0.99 bar (0.099MPa)  
 Pressione massima / Maximum pressure: 15 bar (1.5 MPa)

### Temperature / Temperatures

Temperatura minima / Minimum temperature: -20 °C  
 Temperatura massima / Maximum temperature: +110 °C


### Fluidi compatibili / Fluids

Acqua, Aria compressa, Oli.

Water, Compressed Air, Oil.

## 6036


VALVOLA DI RITEGNO - NON RETURN VALVE



A	H	B	Conf. Pack.
1/2	49	34.5	10
3/4	53.5	42.5	5
1"	58.5	47.5	5
1"1/4	66.5	60	2
1"1/2	72	69	2
2"	77	85	1

# 6037

VALVOLA DI FONDO - FINAL VALVE

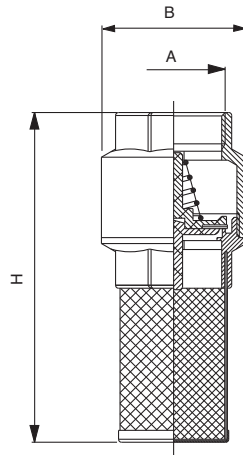


A	H	B	Conf. Pack.
1/2	91	34.5	10
3/4	100.5	42.5	5
1"	105	47.5	5
1"1/4	125	60	4
1"1/2	140	69	2
2"	160	85	1



# 6038

FILTRO IN RETE STIRATA - STRETCHED NET-FILTER



A	B	H	Conf. Pack.
1/2	26	50	10
3/4	32	57	5
1"	41	56.5	5
1"1/4	49	68	5
1"1/2	55	79	5
2"	68	95	1

