


CLAMP

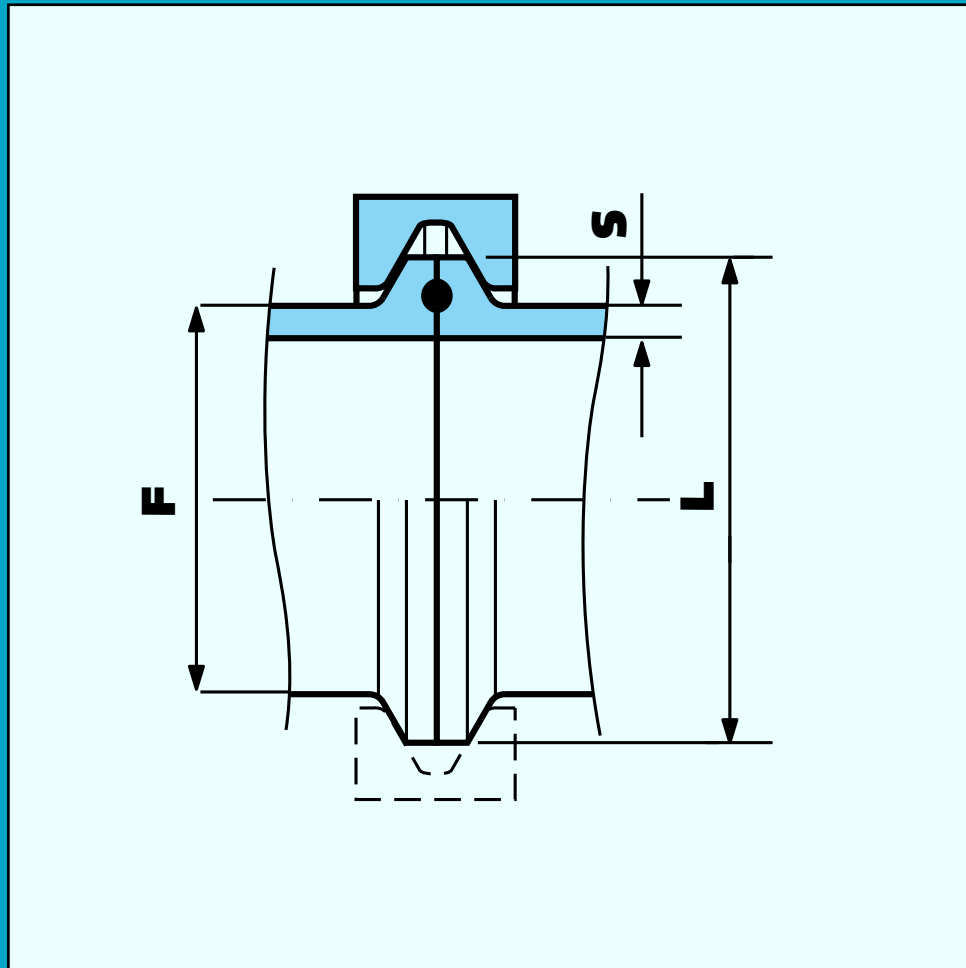

CLAMP "BS 4825"

DN inch	L mm	F mm	S mm
1/2	25,1	12,7	1,65
3/4	25,1	19,1	1,65
1	50,4	25,4	1,65
1 1/2	50,4	38,1	1,65
2	64,0	50,8	1,65
2 1/2	77,4	63,5	1,65
3	90,9	76,1	1,65
4	118,8	101,6	2,00
5	155,0	129,0	2,50
6	167,0	154,0	3,00
8	217,0	204,0	3,00

CLAMP "ISO 1127"

DN mm	L mm	F mm	S mm
8	34,0	13,7	2,00
10	34,0	17,2	2,00
15	34,0	21,3	2,00
20	50,4	26,9	2,00
25	50,4	33,7	2,00
32	50,4	42,4	2,00
40	64,0	48,3	2,00
50	77,4	60,3	2,00
65	90,9	76,2	2,50
80	106,0	88,9	2,50
100	130,0	114,3	3,00
125	155,0	139,7	3,00
150	183,0	168,3	3,00


VALVOLE A FARFALLA (senza maniglia)

Butterfly valves (without handle) • Vannes à papillon (sans poignée)

VALVOLA A FARFALLA CON ATTACCHI CLAMP

Butterfly valve FERRULE CLAMP ends • Vanne à papillon avec attelages FERRULE CLAMP

1.100.LL. --

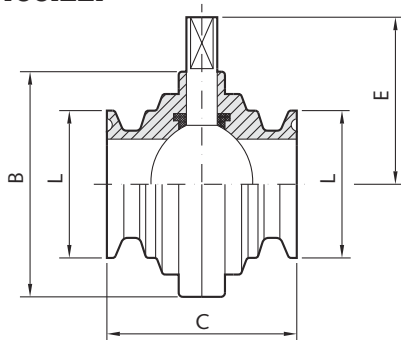


	DN inch	L mm	B mm	C mm	E mm	kg
1.100.LL.03-A	1/2	25,1	50	58	40	0,65
1.100.LL.07-A	3/4	25,1	50	58	40	0,75
1.100.LL.11-A	1	50,4	79	68	58	0,9
1.100.LL.24-A	1 1/2	50,4	85	76	63	0,10
1.100.LL.44-A	2	64	105	80	71	1,75
1.100.LL.58-A	2 1/2	77,4	113	82	76	1,90
1.100.LL.70-A	3	90,9	125	82	81	2,00
1.100.LL.76-A	4	118,8	157	88	100	3,50

VALVOLA A FARFALLA CON ATTACCHI SALDARE-SALDARE

Butterfly valve WELDING-WELDING ends • Vanne à papillon avec attelages SOUDER-SOUDER

1.100.MM. --

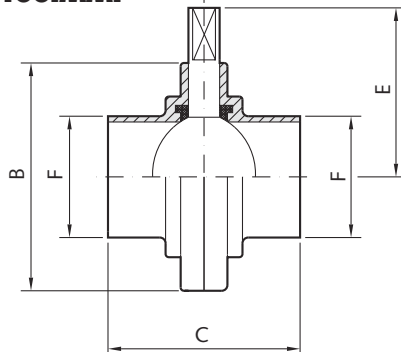


	DN inch	F mm	B mm	C mm	E mm	kg
1.100.MM.03-A	1/2	12,7	50	58	40	0,55
1.100.MM.07-A	3/4	19,1	50	58	40	0,60
1.100.MM.11-A	1	25,4	79	68	58	0,77
1.100.MM.24-A	1 1/2	38,1	85	76	63	0,85
1.100.MM.44-A	2	50,8	105	80	71	1,40
1.100.MM.58-A	2 1/2	63,5	113	82	76	1,50
1.100.MM.70-A	3	76,1	125	82	81	1,75
1.100.MM.76-A	4	101,6	157	88	100	2,70

VALVOLA A FARFALLA CON ATTACCHI SALDARE-CLAMP

Butterfly valve WELDING-FERRULE CLAMP ends • Vanne à papillon avec attelages à SOUDER-FERRULE CLAMP

1.100.ML. --

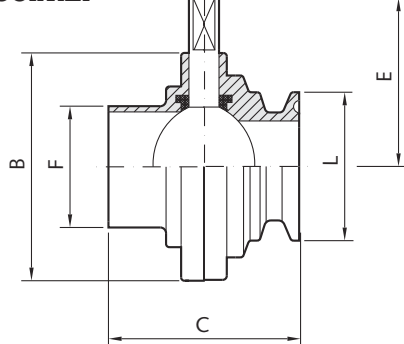

	DN inch	L mm	F mm	B mm	C mm	E mm	kg
1.100.ML.03-A	1/2	12,7	25,1	50	58	40	0,60
1.100.ML.07-A	3/4	19,1	25,1	50	58	40	0,70
1.100.ML.11-A	1	25,4	50,4	79	68	58	0,83
1.100.ML.24-A	1 1/2	38,1	50,4	85	76	63	1,00
1.100.ML.44-A	2	50,8	64	105	80	71	1,60
1.100.ML.58-A	2 1/2	63,5	77,4	113	82	76	1,70
1.100.ML.70-A	3	76,1	90,9	125	82	81	1,90
1.100.ML.76-A	4	101,6	118,8	157	88	100	3,10


VALVOLE A SFERA A DUE VIE "CLASSIC"

"CLASSIC" Two ways ball valves • Vannes à boule à deux voies "CLASSIC"

VALVOLA A SFERA "CLASSIC" CON ATTACCHI CLAMP

"CLASSIC" ball valve FERRULE CLAMP ends • Vanne à boule "CLASSIC" avec attelages CLAMP FERRULE

2.100.LL. --

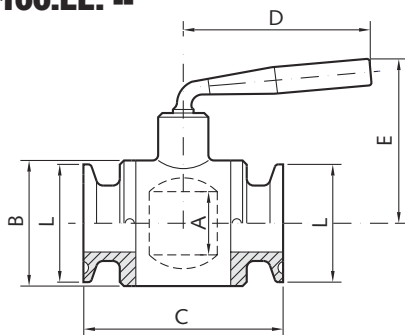


	DN inch	L mm	A mm	B mm	C mm	D mm	E mm	kg
2.100.LL.03-A	1/2	25,1	10	28	64	75	58	0,30
2.100.LL.07-A	3/4	25,1	15	35	78	82	67	0,40
2.100.LL.11-A	1	50,4	25	50	88	98	75	1,00
2.100.LL.24-A	1 1/2	50,4	36	62	96	120	101	1,60
2.100.LL.44-A	2	64	45	78	110	153	120	2,60
2.100.LL.58-A	2 1/2	77,4	57	100	134	153	130	4,20
2.100.LL.70-A	3	90,9	66	114	157	190	158	6,80
2.100.LL.76-A	4	118,8	98,5	160	186	248	230	14,70

VALVOLA A SFERA "CLASSIC" CON ATTACCHI SALDARE-SALDARE

"CLASSIC" ball valve WELDING-WELDING ends • Vanne à boule "CLASSIC" avec attelages SOUDER-SOUDER

2.100.MM. --

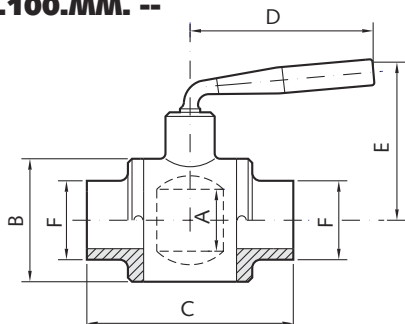


	DN inch	F mm	A mm	B mm	C mm	D mm	E mm	kg
2.100.MM.03-A	1/2	12,7	10	28	64	75	58	0,30
2.100.MM.07-A	3/4	19,1	15	35	78	82	67	0,40
2.100.MM.11-A	1	25,4	25	50	88	98	75	0,80
2.100.MM.24-A	1 1/2	38,1	36	62	104	120	101	1,50
2.100.MM.44-A	2	50,8	45	78	115	153	120	2,50
2.100.MM.58-A	2 1/2	63,5	57	100	138	153	130	4,10
2.100.MM.70-A	3	76,1	66	114	165	190	158	6,20
2.100.MM.76-A	4	101,6	98,5	160	197	248	230	13,30

VALVOLA A SFERA "CLASSIC" CON ATTACCHI SALDARE-CLAMP

"CLASSIC" ball valve WELDING-FERRULE CLAMP ends • Vanne à boule "CLASSIC" avec attelages SOUDER-FERRULE CLAMP

2.100.ML. --

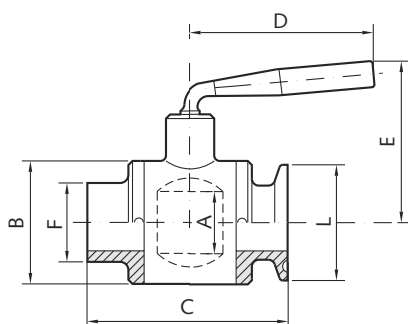

	DN inch	L mm	F mm	A mm	B mm	C mm	E mm	kg
2.100.ML.03-A	1/2	25,1	12,7	10	28	64	58	0,30
2.100.ML.07-A	3/4	25,1	19,1	15	35	78	67	0,40
2.100.ML.11-A	1	50,4	25,4	25	50	88	75	0,90
2.100.ML.24-A	1 1/2	50,4	38,1	36	62	100	101	1,55
2.100.ML.44-A	2	64	50,8	45	78	110	120	2,55
2.100.ML.58-A	2 1/2	77,4	63,5	57	100	136	130	4,15
2.100.ML.70-A	3	90,9	76,1	66	114	161	158	6,35
2.100.ML.76-A	4	118,8	101,6	98,5	160	193	230	13,80


VALVOLE A SFERA A DUE VIE "STAR"

Two ways ball valves • Vannes à boule à deux voies

VALVOLA A SFERA "STAR" CON ATTACCHI CLAMP

"STAR" ball valve FERRULE CLAMP ends • Vanne à boule "STAR" avec attelages FERRULE CLAMP

2.200.LL. --

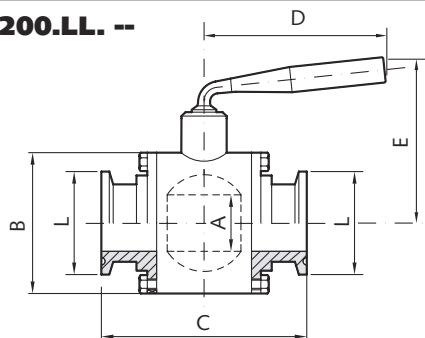


	DN	L	A	B	C	D	E	
	inch	mm	mm	mm	mm	mm	mm	kg
2.200.LL.11-A	1	50,4	25	57	71	98	75	1,13
2.200.LL.24-A	1 1/2	50,4	36	75	90	120	101	1,50
2.200.LL.44-A	2	64	45	91	104	153	120	2,90
2.200.LL.58-A	2 1/2	77,4	57	111	124	153	130	4,70
2.200.LL.70-A	3	90,9	66	126	143	190	158	6,80
2.200.LL.76-A	4	118,8	98,5	172	179	248	230	13,70

VALVOLA A SFERA "STAR" CON ATTACCHI SALDARE

"STAR" ball valve WELDING-WELDING ends • Vanne à boule "STAR" avec attelages SOUDER-SOUDER

2.200.MM. --

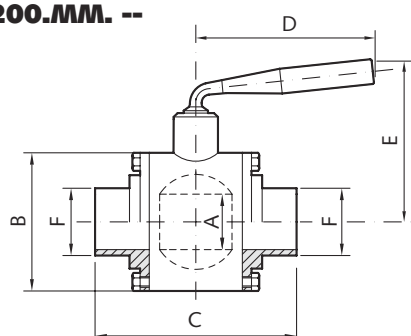


	DN	F	A	B	C	D	E	
	inch	mm	mm	mm	mm	mm	mm	kg
2.200.MM.11-A	1	25,4	25	57	73	98	75	1,10
2.200.MM.24-A	1 1/2	38,1	36	75	94	120	101	1,40
2.200.MM.44-A	2	50,8	45	91	108	153	120	2,70
2.200.MM.58-A	2 1/2	63,5	57	111	128	153	130	4,35
2.200.MM.70-A	3	76,1	66	126	147	190	158	6,40
2.200.MM.76-A	4	76,1	98,5	172	185	248	230	13,50

VALVOLA A SFERA "STAR" CON ATTACCHI SALDARE-CLAMP

"STAR" ball valve WELDING-FERRULE CLAMP ends • Vanne à boule "STAR" avec attelages SOUDER-FERRULE CLAMP

2.200.ML. --

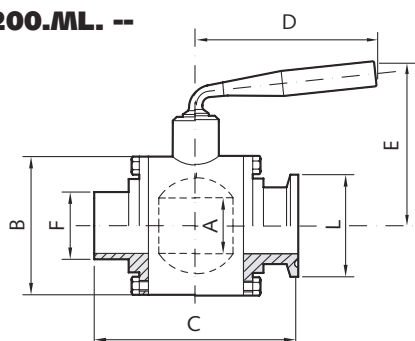

	DN	L	F	A	B	C	E	
	inch	mm	mm	mm	mm	mm	mm	kg
2.100.ML.11-A	1	50,4	25,4	25	57	72	75	1,10
2.100.ML.24-A	1 1/2	50,4	38,1	36	75	92	101	1,45
2.100.ML.44-A	2	64	50,8	45	91	106	120	2,80
2.100.ML.58-A	2 1/2	77,4	63,5	57	111	126	130	4,50
2.100.ML.70-A	3	90,9	76,1	66	126	145	158	6,60
2.100.ML.76-A	4	118,8	101,6	98,5	172	182	230	13,60


VALVOLE A SFERA A TRE VIE

Three ways ball valve ferrule CLAMP ends • Vanne à boule à trois voies

VALVOLA A SFERA "L" A TRE VIE CON ATTACCHI CLAMP

Three ways ball "L" valve ferrule CLAMP ends • Vanne à boule "L" à trois voies avec attelages ferrule CLAMP

2.320.LL. --

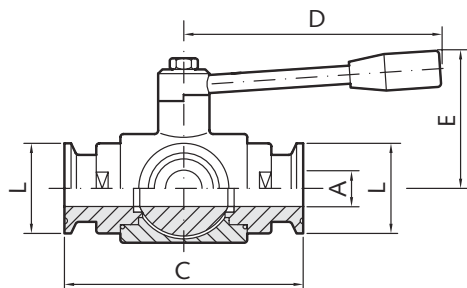


	DN inch	L mm	A mm	C mm	D mm	E mm	PN mm	kg
2.320.LL.03-C	1/2	25,1	10	108	110	60	40	1,10
2.320.LL.07-C	3/4	25,1	15	118	110	65	40	1,30
2.320.LL.10-C	1	50,4	20	130	160	70	40	2,45
2.320.LL.11-C	1	50,4	25	140	160	80	40	3,10
2.320.LL.23-C	1 1/2	50,4	32	156	190	95	40	5,00
2.320.LL.24-C	1 1/2	50,4	40	172	190	110	40	7,40
2.320.LL.44-C	2	64	50	182	235	120	25	8,60
2.320.LL.58-C	2 1/2	77,4	65	196	285	130	25	10,70
2.320.LL.70-C	3	90,9	80	256	310	145	16	22,10
2.320.LL.76-C	4	118,8	100	286	310	160	16	35,00

VALVOLA A SFERA "T" A TRE VIE CON ATTACCHI CLAMP


Three ways ball "T" valve ferrule CLAMP ends • Vanne à boule "T" à trois voies avec attelages ferrule CLAMP

2.330.LL. --

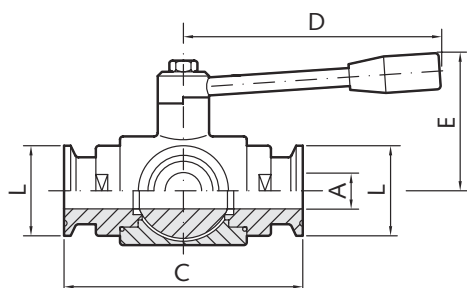


	DN inch	L mm	A mm	C mm	D mm	E mm	PN mm	kg
2.330.LL.03-C	1/2	25,1	10	108	110	60	40	1,10
2.330.LL.07-C	3/4	25,1	15	118	110	65	40	1,30
2.330.LL.10-C	1	50,4	20	130	160	70	40	2,45
2.330.LL.11-C	1	50,4	25	140	160	80	40	3,10
2.330.LL.23-C	1 1/2	50,4	32	156	190	95	40	5,00
2.330.LL.24-C	1 1/2	50,4	40	172	190	110	40	7,40
2.330.LL.44-C	2	64	50	182	235	120	25	8,60
2.330.LL.58-C	2 1/2	77,4	65	196	285	130	25	10,70
2.330.LL.70-C	3	90,9	80	256	310	145	16	22,10
2.330.LL.76-C	4	118,8	100	286	310	160	16	35,00

SFERA "L"



SFERA "T"



1



2



3




4



RUBINETTO A MASCHIO CONICO A DUE VIE CON ATTACCHI CLAMP

Two ways plug cock FERRULE CLAMP ends • Robinet à boisseau à deux voies bouts FERRULE CLAMP

3.090.LL. --

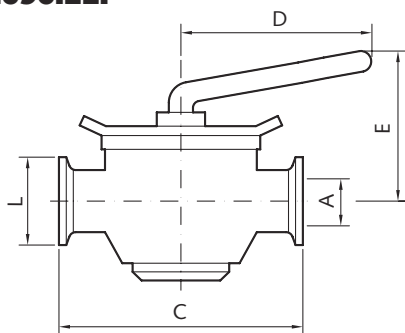


	DN inch	L mm	D mm	E mm	kg
3.090.LL.11-A	1	50,4	110	98	2,00
3.090.LL.24-A	1 1/2	50,4	128	108	4,20
3.090.LL.44-A	2	64	135	123	6,50
3.090.LL.58-A	2 1/2	77,4	167	263	13,50
3.090.LL.70-A	3	90,9			18,50
3.090.LL.76-A	4	118,8			25,00

RUBINETTO A MASCHIO CONICO A TRE VIE CON ATTACCHI CLAMP

Three ways plug cock FERRULE CLAMP ends • Robinet à boisseau à trois voies bouts FERRULE CLAMP

3.100.LL. --

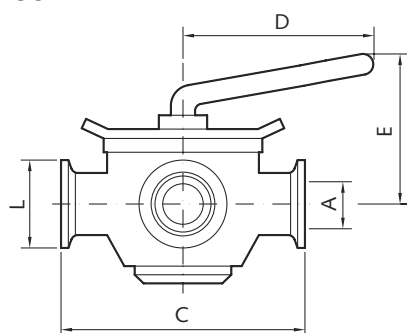


	DN inch	L mm	D mm	E mm	kg
3.100.LL.11-A	1	50,4	110	98	2,00
3.100.LL.24-A	1 1/2	50,4	128	108	4,20
3.100.LL.44-A	2	64	135	123	6,50
3.100.LL.58-A	2 1/2	77,4	167	263	13,50
3.100.LL.70-A	3	90,9			18,50
3.100.LL.76-A	4	118,8			25,00

VALVOLA REGOLAZIONE FLUSSO CON ATTACCHI CLAMP

Relief valve ferrule CLAMP ends • Vanne de réglage du flux avec attelages FERRULE CLAMP

3.140.LL. --

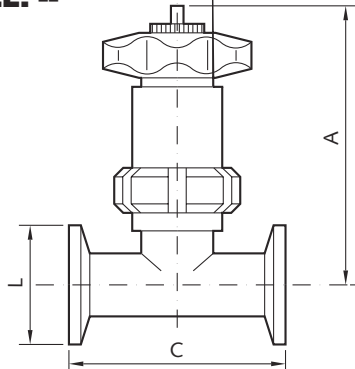


	DN inch	L mm	A mm	C mm	kg
3.140.LL.11-A	1	50,4	148	150	1,50
3.140.LL.24-A	1 1/2	50,4	170	180	2,50
3.140.LL.44-A	2	64	188	200	3,50
3.140.LL.58-A	2 1/2	77,4	209	230	4,20
3.140.LL.70-A	3	90,9	222	260	8,00
3.140.LL.76-A	4	118,8	297	300	13,00

VALVOLA DI SICUREZZA A MOLLA REGOLABILE CON ATTACCHI CLAMP

Adjustable safety valve FERRULE CLAMP ends • Soupape de decharge réglable avec attelages FERRULE CLAMP

3.150.LL. --

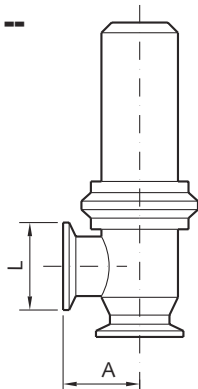


	DN inch	L mm	A mm	bar	m³/h	kg
3.150.LL.11-A	1	50,4	55	0-3	10	2,20
3.150.LL.24-A	1 1/2	50,4	61	3-6	15	2,40
3.150.LL.44-A	2	64	74	3-6	20	3,00
3.150.LL.58-A	2 1/2	77,4	88	3-6	35	4,70

VALVOLA DI RITEGNO CON ATTACCHI CLAMP

Non return valve FERRULE CLAMP ends • Clapet de retenue avec attelages FERRULE CLAMP

3.200.LL. --

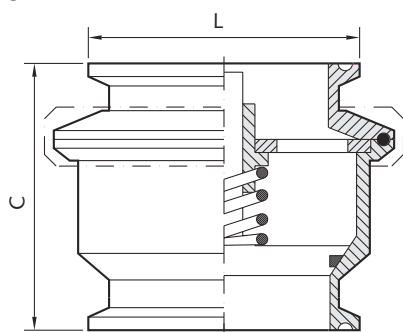


	DN inch	L mm	C mm	kg
3.200.LL.11-A	1	50,4	90	1,00
3.200.LL.24-A	1 1/2	50,4	90	1,20
3.200.LL.44-A	2	64	109	2,00
3.200.LL.58-A	2 1/2	77,4	120	2,50
3.200.LL.70-A	3	90,9	149	4,30
3.200.LL.76-A	4	118,8	158	5,20

VALVOLA DI RITEGNO CON ATTACCHI A SALDARE-SALDARE

Non return valve WELDING-WELDING ends • Clapet de retenue avec attelages SOUDER-SOUDER

3.200.MM. --

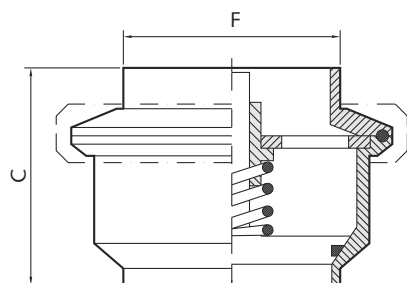


	DN inch	F mm	C mm	kg
3.200.MM.11-A	1	25,4	90	0,90
3.200.MM.24-A	1 1/2	38,	90	1,10
3.200.MM.44-A	2	50,8	109	1,90
3.200.MM.58-A	2 1/2	63,5	120	2,40
3.200.MM.70-A	3	76,2	149	4,20
3.200.MM.76-A	4	101,6	158	5,00

SPECOLA DI LINEA CON ATTACCHI CLAMP A MORSETTO

In line sight glass FERRULE CLAMP ends • Mireur avec attelages FERRULE CLAMP

3.240.LL. --

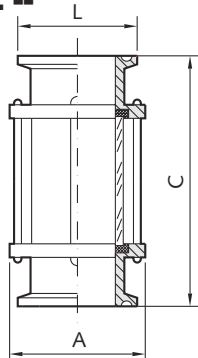


	DN inch	L mm	A mm	C mm	kg
3.240.LL.11-A	1	50,4	55	165	0,55
3.240.LL.24-A	1 1/2	50,4	70	165	0,75
3.240.LL.44-A	2	64	85	165	1,00
3.240.LL.58-A	2 1/2	77,4	95	165	1,20
3.240.LL.70-A	3	90,9	105	165	1,40
3.240.LL.76-A	4	118,8	140	165	3,20

SPECOLA DI LINEA CON ATTACCHI CLAMP A SALDARE

In line sight glass WELDING ends • Mireur avec attelages CLAMP à SOUDER-SOUDER

3.240.MM. --

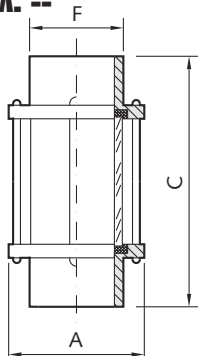

	DN inch	F mm	A mm	C mm	kg
3.240.MM.11-A	1	25,4	55	165	0,45
3.240.MM.24-A	1 1/2	38,1	70	165	0,65
3.240.MM.44-A	2	50,8	85	165	0,90
3.240.MM.58-A	2 1/2	63,5	95	165	1,00
3.240.MM.70-A	3	76,2	105	165	1,10
3.240.MM.76-A	4	101,6	140	165	2,80


RACCORDI

Pipe fittings • Raccords

MORSETTO DI SERRAGGIO CLAMP A DOPPIO SNODO

Heavy duty CLAMP double pin • Collier pour raccord CLAMP

4.100.LL. --

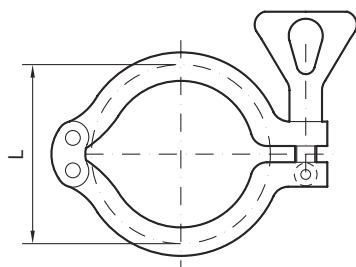


	DN inch	L mm	kg
4.100.LL.03-A	1/2	25,1	0,10
4.100.LL.07-A	3/4	25,1	0,15
4.100.LL.11-A	1	50,4	0,22
4.100.LL.24-A	1 1/2	50,4	0,22
4.100.LL.44-A	2	64,0	0,26
4.100.LL.58-A	2 1/2	77,4	0,33
4.100.LL.70-A	3	90,9	0,40
4.100.LL.76-A	4	118,8	0,50
4.100.LL.84-A	5	155,0	0,75
4.100.LL.87-A	6	167,0	0,50

GUARNIZIONE PER RACCORDO CLAMP

Gasket CLAMP • Joint de raccord CLAMP

4.090.LL. --




	DN inch	A mm	L mm
4.090.LL.03-I	1/2	9,5	25,1
4.090.LL.07-I	3/4	15,9	25,1
4.090.LL.11-I	1	22,22	50,4
4.090.LL.24-I	1 1/2	34,9	50,4
4.090.LL.44-I	2	47,6	64,0
4.090.LL.58-I	2 1/2	60,3	77,4
4.090.LL.70-I	3	73	90,9
4.090.LL.76-I	4	97,6	118,8
4.090.LL.84-I	5	123	167,0
4.090.LL.76-I	6	150	217,0

TRONCHETTO CLAMP A SALDARE

CLAMP WELDING FERRULE • Ferrule à SOUDER CLAMP

4.540.LM. --




	DN inch	L mm	F mm	C mm	S mm	kg
4.540.LM.03-B	1/2	25,4	12,7	28,6	1,65	0,02
4.540.LM.07-B	3/4	25,4	19,1	28,6	1,65	0,02
4.540.LM.11-B	1	50,4	25,4	28,6	1,65	0,08
4.540.LM.24-B	1 1/2	50,4	38,1	28,6	1,65	0,07
4.540.LM.44-B	2	64	50,8	28,6	1,65	0,10
4.540.LM.58-B	2 1/2	77,4	63,5	28,6	1,65	0,12
4.540.LM.70-B	3	90,9	76,1	28,6	1,65	0,15
4.540.LM.76-B	4	118,8	101,6	28,6	2,00	0,25
4.540.LM.84-B	5	155	129,0	28,6	2,50	0,32
4.540.LM.87-B	6	167	129,0	28,6	3,00	0,40

TAPPO DI CHIUSURA CLAMP

CLAMP end cap • Bouchon CLAMP

4.110.L9. --




	DN inch	L mm	C mm	kg
4.110.L9.03-B	1/2	25,1	6,5	0,02
4.110.L9.07-B	3/4	25,1	6,5	0,02
4.110.L9.11-B	1	50,4	6,5	0,07
4.110.L9.24-B	1 1/2	50,4	6,5	0,07
4.110.L9.44-B	2	64	6,5	0,15
4.110.L9.58-B	2 1/2	77,4	6,5	0,20
4.110.L9.70-B	3	90,9	6,5	0,40
4.110.L9.76-B	4	118,8	8	0,55
4.110.L9.84-B	5	155	10	1,40
4.110.L9.87-B	6	167	10	2,20

TRONCHETTO CLAMP CORTO A SALDARE

CLAMP short-WELDING FERRULE • Ferrule court à SOUDER CLAMP

4.550.LM. --




	DN inch	L mm	F mm	C mm	S mm	kg
4.550.LM.03-B	1/2	25,1	12,7	13	1,65	0,01
4.550.LM.07-B	3/4	25,1	19,1	13	1,65	0,02
4.550.LM.11-B	1	50,4	25,4	13	1,65	0,06
4.550.LM.24-B	1 1/2	50,4	38,1	13	1,65	0,05
4.550.LM.44-B	2	64	50,8	13	1,65	0,06
4.550.LM.58-B	2 1/2	77,4	63,5	13	1,65	0,08
4.550.LM.70-B	3	90,9	76,1	13	1,65	0,10
4.550.LM.76-B	4	118,8	101,6	16	2	0,20

SEMIRACCORDO CLAMP PORTAGOMMA

Hose CLAMP holder • Ferrule à ligaturer

4.220.LV. --

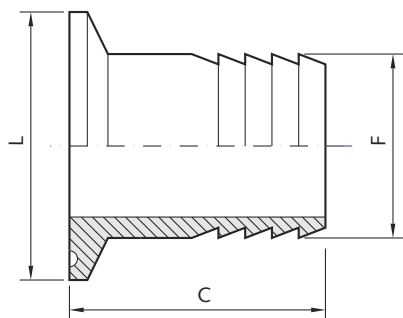


	DN inch	L mm	F mm	C mm	kg
4.220.LV.03-B	1/2	25,4	12,7	38	0,03
4.220.LV.07-B	3/4	25,4	19,0	38	0,04
4.220.LV.11-B	1	50,4	25,4	43	0,07
4.220.LV.24-B	1 1/2	50,4	38,1	43	0,14
4.220.LV.44-B	2	64	50,8	59	0,25
4.220.LV.58-B	2 1/2	77,4	63,5	60	0,37
4.220.LV.70-B	3	90,9	76,2	79	0,50
4.220.LV.76-B	4	118,8	101,6	86	0,70

RIDUZIONE CONCENTRICA CON ATTACCHI CLAMP

Concentric reducer with FERRULE CLAMP ends • Reduction concentrique avec attelages FERRULE CLAMP

4.310.LL. --

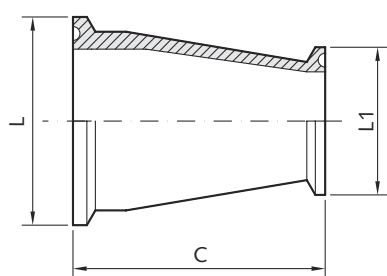


	DN inch	DN1 inch	L mm	L1 mm	C mm	kg
4.310.LL.24-B	1 1/2	1	50,4	50,4	76	0,15
4.310.LL.44-B	2	1 1/2	64	50,4	76	0,25
4.310.LL.58-B	2 1/2	2	77,4	64	122	0,30
4.310.LL.70-B	3	2 1/2	90,9	77,4	122	0,40
4.310.LL.76-B	4	3	118,8	90,9	148	0,80

RIDUZIONE ECCENTRICA CON ATTACCHI CLAMP

Excentric reducer with FERRULE CLAMP ends • Reduction eccentric avec attelages FERRULE CLAMP

4.315.LL. --

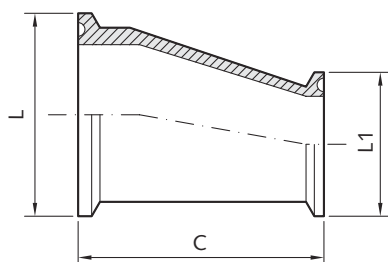


	DN inch	DN1 inch	L mm	L1 mm	C mm	kg
4.315.LL.24-B	1 1/2	1	50,4	50,4	125	0,25
4.315.LL.44-B	2	1 1/2	64	50,4	125	0,26
4.315.LL.58-B	2 1/2	2	77,4	64	170	0,30
4.315.LL.70-B	3	2 1/2	90,9	77,4	130	0,40
4.315.LL.76-B	4	3	118,8	90,9	163	0,80

CURVA 180° CON ATTACCHI CLAMP

180° elbow with FERRULE CLAMP ends • Coude 180° avec attelages FERRULE CLAMP

4.370.LL. --

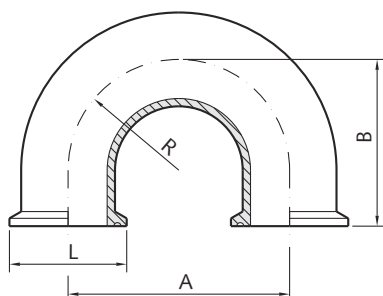


	DN inch	L mm	A mm	B mm	R mm	kg
4.370.LL.11-B	1	50,4	81	88	38	0,35
4.370.LL.24-B	1 1/2	50,4	104	103	57	0,60
4.370.LL.44-B	2	64	143	113	76	0,75
4.370.LL.58-B	2 1/2	77,4	168	128	95	1,00
4.370.LL.70-B	3	90,9	171	143	114	1,80
4.370.LL.76-B	4	118,8	220	168	152	3,30

CURVA 90° CON ATTACCHI CLAMP

90° elbow with FERRULE CLAMP ends • Coude 90° avec attelages FERRULE CLAMP

4.430.LL. --




	DN inch	L mm	A mm	R mm	kg
4.430.LL.11-B	1	50,4	59	38,1	0,17
4.430.LL.24-B	1 1/2	50,4	70	57,2	0,20
4.430.LL.44-B	2	64	89	76,2	0,37
4.430.LL.58-B	2 1/2	77,4	108	95,3	0,50
4.430.LL.70-B	3	90,9	127	114,3	0,90
4.430.LL.76-B	4	118,8	168	152,4	1,65

PEZZO A "T" CON ATTACCHI CLAMP

Tee with FERRULE CLAMP ends • Té avec attelages FERRULE CLAMP

4.500.LL. --

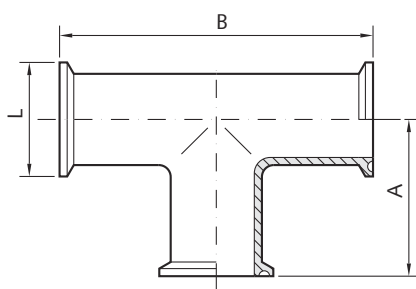


	DN inch	L mm	A mm	B mm	kg
4.500.LL.11-B	1	50,4	60	120	0,18
4.500.LL.24-B	1 1/2	50,4	70	140	0,32
4.500.LL.44-B	2	64	89	178	0,65
4.500.LL.58-B	2 1/2	77,4	89	178	0,80
4.500.LL.70-B	3	90,9	95	190	1,14
4.500.LL.76-B	4	118,8	114	228	1,80

PEZZO A CROCE CON ATTACCHI CLAMP

Cross with FERRULE CLAMP ends • Croix avec attelages FERRULE CLAMP

4.520.LL. --

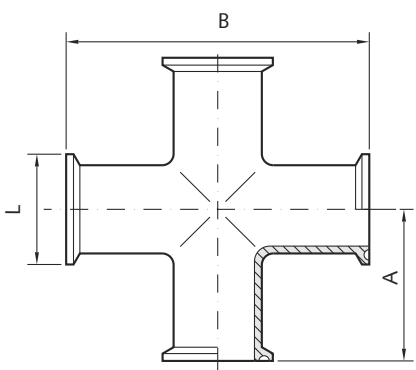


	DN inch	L mm	A mm	B mm	kg
4.520.LL.11-B	1	50,4	60	120	0,25
4.520.LL.24-B	1 1/2	50,4	70	140	0,40
4.520.LL.44-B	2	64	89	178	0,70
4.520.LL.58-B	2 1/2	77,4	89	178	0,80
4.520.LL.70-B	3	90,9	95	190	1,25
4.520.LL.76-B	4	118,8	114	228	1,90

MORSETTO DI SERRAGGIO CLAMP A DUE SETTORI (Dimensioni ISO 1127)

Heavy duty CLAMP (ISO 1127 dimensions) • Collier pour raccord CLAMP (dimension ISO 1127)

4.101.LL. --

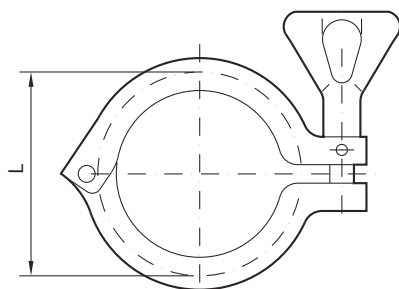


	DN mm	L mm	kg
4.101.LL.08-A	15	34,0	0,18
4.101.LL.10-A	20	50,4	0,22
4.101.LL.13-A	25	50,4	0,22
4.101.LL.29-A	32	50,4	0,22
4.101.LL.38-A	40	64	0,26
4.101.LL.50-A	50	77,4	0,33
4.101.LL.61-A	65	90,9	0,40
4.101.LL.71-A	80	106	0,48
4.101.LL.80-A	100	130	0,70
4.101.LL.82-A	125	155	0,75

GUARNIZIONE PER RACCORDO CLAMP (Dimensioni ISO 1127)

Gasket CLAMP (ISO 1127 dimensions) • Joint de raccord CLAMP (dimension ISO 1127)

4.091.LL. --




	DN mm	A mm	L mm
4.091.LL.08-A	15	17,3	34
4.091.LL.10-A	20	22,9	50,4
4.091.LL.13-A	25	29,7	50,4
4.091.LL.29-A	32	38,4	50,4
4.091.LL.38-A	40	44,3	64
4.091.LL.50-A	50	56,3	77,4
4.091.LL.61-A	65	71,1	90,9
4.091.LL.71-A	80	83,9	106
4.091.LL.80-A	100	108,3	130
4.091.LL.82-A	125	133,7	155

TRONCHETTO CLAMP A SALDARE (Dimensioni ISO 1127)

CLAMP (ISO 1127 dimensions) WELDING FERRULE • Ferrule à souder CLAMP (dimension ISO 1127)

4.541.LM. --




	DN mm	L mm	F mm	C mm	S mm
4.541.LM.08-A	15	34	21,3	21,5	2
4.541.LM.10-A	20	50,4	26,9	21,5	2
4.541.LM.13-A	25	50,4	33,7	21,5	2
4.541.LM.29-A	32	50,4	42,4	21,5	2
4.541.LM.38-A	40	64	48,3	21,5	2
4.541.LM.50-A	50	77,4	60,3	21,5	2
4.541.LM.61-A	65	90,9	76,1	21,5	2,5
4.541.LM.71-A	80	106	88,9	21,5	2,5
4.541.LM.80-A	100	130	114,3	28,6	3
4.541.LM.82-A	125	155	139,7	28,6	3

TAPPO DI CHIUSURA CLAMP (Dimensioni ISO 1127)

CLAMP (ISO 1127 dimensions) end cap • Bouchon CLAMP (dimension ISO 1127)

4.111.L9. --



	DN mm	L mm	C mm
4.111.L9.08-A	15	34	4,7
4.111.L9.10-A	20	50,4	6,4
4.111.L9.13-A	25	50,4	6,4
4.111.L9.29-A	32	50,4	6,4
4.111.L9.38-A	40	64	6,4
4.111.L9.50-A	50	77,4	6,4
4.111.L9.61-A	65	90,9	6,4
4.111.L9.71-A	80	106	6,4
4.111.L9.80-A	100	130	7,9
4.111.L9.82-A	125	155	10


TUBI, CURVE, TEE, RIDUZIONI, FLANGE

Tubes, bends, tee, reducers, flanges • Tubes, coudes, Té, réductions, brides

TUBO LAMINATO A FREDDO, LUCIDO ESTERNO-SATINATO INTERNO (BS 4825)

Cold rolled pipe mirror polished external - satin polished internal • Tube laminé à froid poli a miroir à l'extérieur - satiné à l'intérieur

5.004.M9. --




	DN inch	F mm	S mm
5.004.M9.03-A	1/2	12,7	1,65
5.004.M9.07-A	3/4	19,1	1,65
5.004.M9.11-A	1	25,4	1,65
5.004.M9.24-A	1 1/2	38,1	1,65
5.004.M9.44-A	2	50,8	1,65
5.004.M9.58-A	2 1/2	63,5	1,65
5.004.M9.70-A	3	76,1	1,65
5.004.M9.76-A	4	101,6	2

CURVA 180° A SALDARE LUCIDO ESTERNO-SATINATO INTERNO (BS 4825)

180° WELDING bend mirror polished external - satin polished internal • Coude 180° à souder poli a miroir à l'extérieur - satiné à l'intérieur

5.140.MM. --

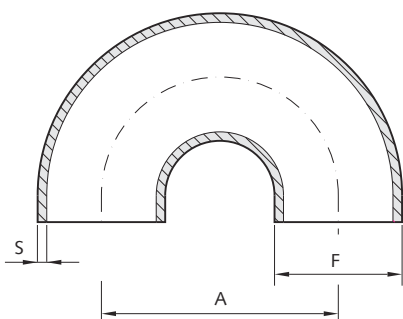


	DN inch	F mm	S mm	A mm	kg
5.140.MM.11-A	1	25,4	1,65	81	0,17
5.140.MM.24-A	1 1/2	38,1	1,65	106	0,32
5.140.MM.44-A	2	50,8	1,65	144	0,50
5.140.MM.58-A	2 1/2	63,5	1,65	172	0,75
5.140.MM.70-A	3	76,1	1,65	174	1,20
5.140.MM.76-A	4	101,6	2	220	2,00

CURVA 90° A SALDARE LUCIDO ESTERNO-SATINATO INTERNO (BS 4825)

90° WELDING bend mirror polished external - satin polished internal • Coude 90° à souder poli a miroir à l'extérieur - satiné à l'intérieur

5.240.MM. --

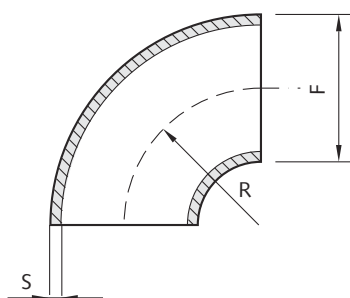


	DN inch	F mm	S mm	R mm	kg
5.240.MM.11-A	1	25,4	1,65	38	0,16
5.240.MM.24-A	1 1/2	38,1	1,65	57	0,18
5.240.MM.44-A	2	50,8	1,65	76	0,35
5.240.MM.58-A	2 1/2	63,5	1,65	96	0,45
5.240.MM.70-A	3	76,1	1,65	114	0,70
5.240.MM.76-A	4	101,6	2	152	1,30

CURVA 45° A SALDARE LUCIDO ESTERNO-SATINATO INTERNO (BS 4825)

45° WELDING bend mirror polished external - satin polished internal • Coude 45° à souder poli a miroir à l'extérieur - satiné à l'intérieur

5.340.MM. --



	DN inch	F mm	S mm	R mm	kg
5.340.MM.11-A	1	25,4	1,65	38	0,05
5.340.MM.24-A	1 1/2	38,1	1,65	57	0,10
5.340.MM.44-A	2	50,8	1,65	76	0,20
5.340.MM.58-A	2 1/2	63,5	1,65	96	0,20
5.340.MM.70-A	3	76,1	1,65	114	0,50
5.340.MM.76-A	4	101,6	2	152	0,80


TUBI, CURVE, TEE, RIDUZIONI, FLANGE

Tubes, bends, tee, reducers, flanges • Tubes, courbes, pieces a "T", réductions, brides

TEE A SILDARE LUCIDO ESTERNO-SATINATO INTERNO (BS 4825)

Equal tee WELDING mirror polished external - satin polished internal • Té à souder poli a miroir à l'extérieur - satiné à l'intérieur

5.440.MM. --

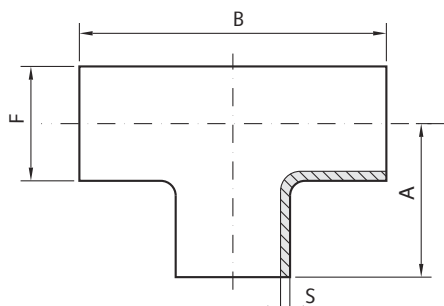


	DN inch	F mm	S mm	A mm	B mm	kg
5.440.MM.11-A	1	25,4	1,65	47,6	95,2	0,08
5.440.MM.24-A	1 1/2	38,1	1,65	57,2	114,4	0,16
5.440.MM.44-A	2	50,8	1,65	76,2	152,4	0,25
5.440.MM.58-A	2 1/2	63,5	1,65	76,2	152,4	0,35
5.440.MM.70-A	3	76,1	1,65	82,6	165,2	0,50
5.440.MM.76-A	4	101,6	2,00	98,5	197,0	0,90

REGGITUBO CON ATTACCO FILETTATO

Pipe support threaded fastening • Collier avisser

5.810.M9. --

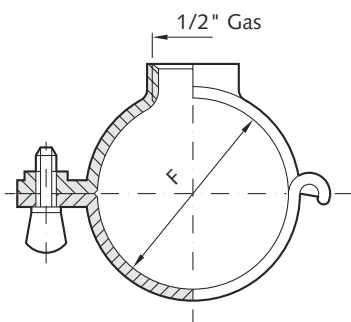

	DN inch	F mm	kg
5.810.M9.11-A	1	25,4	0,11
5.810.M9.24-A	1 1/2	38,1	0,13
5.810.M9.44-A	2	50,8	0,16
5.810.M9.58-A	2 1/2	63,5	0,20
5.810.M9.70-A	3	76,1	0,22
5.810.M9.76-A	4	101,6	0,27