



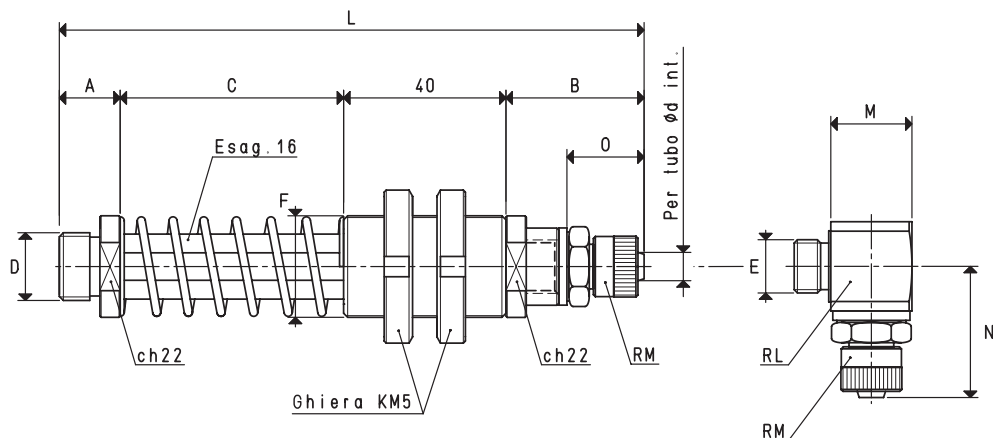

PORTAVENTOSE SPECIALI ANTIROTATIVI CON ATTACCO FILETTATO MASCHIO

Le corse effettive di molleggio sono:

- Per la quota C= 55 mm 37 mm
- Per la quota C= 110 mm 84 mm

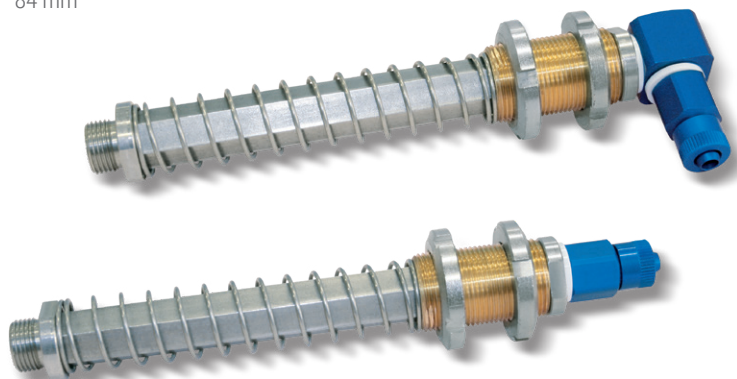

VERSIONE 06

VERSIONE 06 L

PORTAVENTOSE CON RACCORDO RAPIDO DIRITTO PER TUBO IN PLASTICA

Art.	A	B	C	D Ø	d Ø	E Ø	F Ø	L	M	N	O	RL	RM	Peso g
06 55 90	15	34	55	G1/4"	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	314
06 55 91	15	34	55	G3/8"	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	320
06 55 92	15	40	55	G3/8"	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	330
06 55 93	15	40	55	G1/2"	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	332
06 55 94	15	34	55	M12	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	318
06 55 95	15	40	55	M12	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	328
06 55 96	15	40	55	M16	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	330
06 110 90	15	34	110	G1/4"	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	374
06 110 91	15	34	110	G3/8"	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	380
06 110 92	15	40	110	G3/8"	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	390
06 110 93	15	40	110	G1/2"	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	392
06 110 94	15	34	110	M12	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	378
06 110 95	15	40	110	M12	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	388
06 110 96	15	40	110	M16	6	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	390

N.B. Per ordinare i portaventose con i raccordi a L, aggiungere al codice la lettera L.

Rapporti di trasformazione: N (newton) = Kg x 9.81 (forza di gravità) ; inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$