



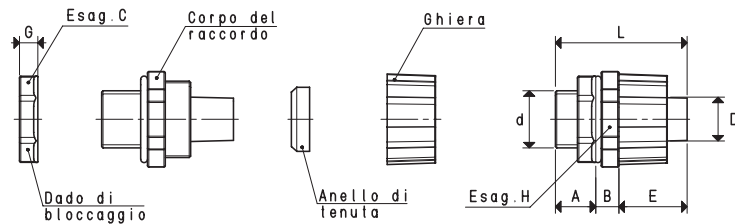

RACCORDI PER TUBI FLESSIBILI TPR


Sono disponibili i disegni 3D sul sito vuototecnica.net

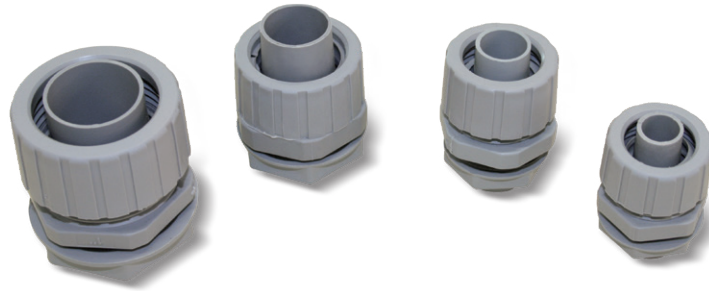

RACCORDI RTPR

Art.	d Ø	A	B	C	D Ø	E	G	H	L	Materiale	Colore	Peso g
RTPR 3/8"	G3/8"	14.5	8.5	26	12.0	23.5	6	28	46.5	pvc	grigio	12
RTPR 1/2"	G1/2"	14.5	9.0	28	15.5	26.5	7	33	50.0	pvc	grigio	18
RTPR 3/4"	G3/4"	14.0	10.5	35	20.8	26.5	9	38	51.0	pvc	grigio	26
RTPR 1"	G1"	16.0	9.0	41	26.5	32.5	10	44	57.5	pvc	grigio	36

Temperatura di esercizio: -10° / +60 °C

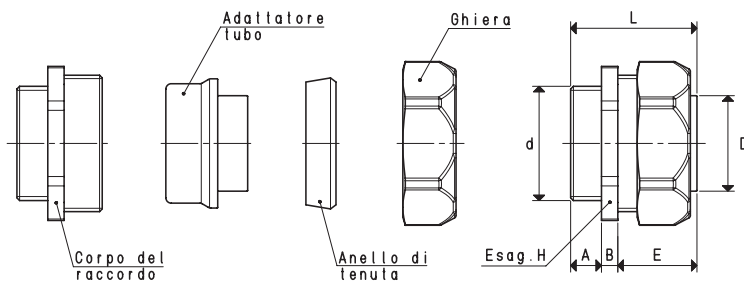

RACCORDI RTPR

Art.	d Ø	A	B	D Ø	E	H	L	Materiale	Peso g
RTPR 1" 1/4	G1" 1/4	11	6	34.5	28.5	52	45.5	ottone nichelato	340
RTPR 1" 1/2	G1" 1/2	14	7	39.5	34.0	60	55.0	ottone nichelato	530
RTPR 2"	G2"	14	7	50.0	33.0	74	54.0	ottone nichelato	596

Temperatura di esercizio: -20° / +60 °C

Rapporti di trasformazione: N (newton) = Kg x 9.81 (forza di gravità); inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adattatori per filettature GAS - NPT disponibili a pag. 1.130